

PRODUCT OVERVIEW

09-2022

TA // COLOR AND MONO MULTIFUNCTIONAL SYSTEMS



Content

Color Systems

A3 Multifunctional Systems page 3

A4 Multifunctional Systems page 5

A4 Print Systems page 8

Mono Systems

A3 Multifunctional Systems page 9

A4 Multifunctional Systems page 11

A3 Print Systems page 15

A4 Print Systems page 16

A3 Multifunctional Systems

Optional features are marked in grey font.



		P-C2480i MFP	2508ci	3508ci	4008ci
COPY	COPY SPEED	24 A4 / 12 A3 pages/min in colour and b/w	25 A4 / 12 A3 pages/min in colour and b/w	35 A4 / 17 A3 pages/min in colour and b/w	40 A4 / 20 A3 pages/min in colour and b/w
	COPY RESOLUTION	600 x 600 dpi	600 x 600 dpi	600 x 600 dpi	600 x 600 dpi
	GREYSCALES	256	256	256	256
	STANDARD PAPER FEED	600 (500 + 100 sheets)	1,150 (2 x 500 + 150 sheets)	1,150 (2 x 500 + 150 sheets)	1,150 (2 x 500 + 150 sheets)
	OPTIONAL PAPER FEED	1 or 2 x 500 sheets	2 x 500, 2 x 1,500, 3,000 sheets, different combinations possible	2 x 500, 2 x 1,500, 3,000 sheets, different combinations possible	2 x 500, 2 x 1,500, 3,000 sheets, different combinations possible
	PAPER CAPACITY, MAX	1,600 sheets	7,150 sheets	7,150 sheets	7,150 sheets
	PAPER FORMAT	A6R-A3	A6R-SRA3/A3+	A6R-SRA3/A3+	A6R-SRA3/A3+
	ORIGINAL FEEDER	Standard	Option: DP-7140, DP-7150, DP-7160 or DP-7170	Option: DP-7140, DP-7150, DP-7160 or DP-7170	Option: DP-7150, DP-7160 or DP-7170
	DUPLEX	Standard	Standard	Standard	Standard
	SYSTEM MEMORY	1.5 GB (max 3 GB)	4 GB RAM, 32 GB SSD/320 GB or 1 TB HDD	4 GB RAM, 32 GB SSD/320 GB or 1 TB HDD	4 GB RAM, 64 GB SSD/320 GB or 1 TB HDD
ZOOM	25%-400%	25%-400%	25%-400%	25%-400%	
CABINET	Option: no. 62	Option: no. 81	Option: no. 81	Option: no. 81	
PRINT	TYPE	Integrated within the system	Integrated within the system	Integrated within the system	Integrated within the system
	INTERFACES	USB 2.0, 10/100/1000BaseTX, USB host (2), NFC, Wi-Fi	USB 3.0, USB 2.0, 10/100/1000BaseTX, USB host, NFC	USB 3.0, USB 2.0, 10/100/1000BaseTX, USB host, NFC	USB 3.0, USB 2.0, 10/100/1000BaseTX, USB host, NFC
	OPERATING SYSTEMS	Windows 8/8.1/10/11, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022, Linux, Chrome OS, Mac ex OS 10.9	Windows 8/8.1/10/11, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022, Linux, Chrome OS, Mac ex OS 10.9	Windows 8/8.1/10/11, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022, Linux, Chrome OS, Mac ex OS 10.9	Windows 8/8.1/10/11, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022, Linux, Chrome OS, Mac ex OS 10.9
EMULATIONS	PCL6 (5c, XL), KPDL 3 (PostScript 3 compatible), PRESCRIBE IIC, XPS	PCL6 (5c, XL), KPDL 3 (PostScript 3 compatible), PRESCRIBE IIC, PDF 2.0, XPS	PCL6 (5c, XL), KPDL 3 (PostScript 3 compatible), PRESCRIBE IIC, PDF 2.0, XPS	PCL6 (5c, XL), KPDL 3 (PostScript 3 compatible), PRESCRIBE IIC, PDF 2.0, XPS	
NETWORK	INTERFACES	10/100/1000BaseTX	10/100/1000BaseTX	10/100/1000BaseTX	10/100/1000BaseTX
	NETWORK PROTOCOLS	TCP/IP, Net BEUI	TCP/IP, Net BEUI	TCP/IP, Net BEUI	TCP/IP, Net BEUI
	OPERATING SYSTEMS	Windows 8/8.1/10, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022	Windows 8/8.1/10, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022	Windows 8/8.1/10, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022	Windows 8/8.1/10, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022
SCAN	SCAN TYPE	CIS colour and b/w	CCD colour and b/w	CCD colour and b/w	CCD colour and b/w
	SCAN RESOLUTION	200, 300, 400, 600 dpi	200, 300, 400, 600 dpi	200, 300, 400, 600 dpi	200, 300, 400, 600 dpi
	INTERFACES	10/100/1000BaseTX, USB 2.0	10/100/1000BaseTX	10/100/1000BaseTX	10/100/1000BaseTX
	NETWORK PROTOCOLS	TCP/IP	TCP/IP	TCP/IP	TCP/IP
FAX	ORIGINALS	max A3	max A3	max A3	max A3
	MODEM SPEED	33.6 kbps	33.6 kbps	33.6 kbps	33.6 kbps
	COMPRESSION METHOD	JBIG, MMR, MR, MH	JBIG, MMR, MR, MH	JBIG, MMR, MR, MH	JBIG, MMR, MR, MH
	ONE-TOUCH DIAL/ABBR. DIAL	100/200	1,000/2,000	1,000/2,000	1,000/2,000

A3 Multifunctional Systems

Optional features are marked in grey font.



		5008ci	6008ci	7008ci	8307ci
COPY	COPY SPEED	50 A4 / 25 A3 pages/min in colour and b/w	60 A4 / 30 A3 pages/min in colour and b/w	70 A4 / 35 A3 pages/min in colour and b/w	70/83 A4 / 35/41 A3 pages/min in colour and b/w
	COPY RESOLUTION	600 x 600 dpi	600 x 600 dpi	600 x 600 dpi	600 x 600 dpi
	GREYSCALES	256	256	256	256
	STANDARD PAPER FEED	1,150 (2 x 500 + 150 sheets)	1,150 (2 x 500 + 150 sheets)	1,150 (2 x 500 + 150 sheets)	4,150 (2 x 500 + 2 x 1,500 + 150 sheets)
	OPTIONAL PAPER FEED	2 x 500, 2 x 1,500, 3,000 sheets, different combinations possible	2 x 500, 2 x 1,500, 3,000 sheets, different combinations possible	2 x 500, 2 x 1,500, 3,000 sheets, different combinations possible	2 x 500, 2 x 1,500, 3,000 sheets, different combinations possible
	PAPER CAPACITY, MAX	7,150 sheets	7,650 sheets	7,650 sheets	7,650 sheets
	PAPER FORMAT	A6R-SRA3/A3+	A6R-SRA3/A3+	A6R-SRA3/A3+	A6R-A3+
	ORIGINAL FEEDER	Option: DP-7150, DP-7160 or DP-7170	Option: DP-7150, DP-7160 or DP-7170	Option: DP-7150, DP-7160 or DP-7170	Standard (dual scan with multi-feed detection)
	DUPLEX	Standard	Standard	Standard	Standard
	SYSTEM MEMORY	4 GB RAM, 64 GB SSD/320 GB HDD or 1 TB HDD	4 GB RAM, 64 GB SSD/320 GB HDD or 1 TB HDD	4 GB RAM, 64 GB SSD/320 GB HDD or 1 TB HDD	4.5 GB RAM, 8 GB SSD/320 GB HDD
ZOOM	25%–400%	25%–400%	25%–400%	25%–400%	
CABINET	Option: no. 81	Option: no. 81	Option: no. 81	--	
PRINT	TYPE	Integrated within the system	Integrated within the system	Integrated within the system	Integrated within the system
	INTERFACES	USB 3.0, USB 2.0, 10/100/1000BaseTX, USB host, NFC	USB 3.0, USB 2.0, 10/100/1000BaseTX, USB host, NFC	USB 3.0, USB 2.0, 10/100/1000BaseTX, USB host, NFC	USB 2.0, 10/100/1000BaseTX, USB host, NFC
	OPERATING SYSTEMS	Windows 8/8.1/10/11, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022, Linux, Chrome OS, Mac ex OS 10.9	Windows 8/8.1/10/11, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022, Linux, Chrome OS, Mac ex OS 10.9	Windows 8/8.1/10/11, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022, Linux, Chrome OS, Mac ex OS 10.9	Windows 8/8.1/10/11, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022, Linux, Chrome OS, Mac ex OS 10.9
	EMULATIONS	PCL6 (5c, XL), KPDL 3 (PostScript 3 compatible), PRESCRIBE IIC, PDF 2.0, XPS	PCL6 (5c, XL), KPDL 3 (PostScript 3 compatible), PRESCRIBE IIC, PDF 2.0, XPS	PCL6 (5c, XL), KPDL 3 (PostScript 3 compatible), PRESCRIBE IIC, PDF 2.0, XPS	PCL6 (5c, XL), KPDL 3 (PostScript 3 compatible), PRESCRIBE IIC, XPS
NETWORK	INTERFACES	10/100/1000BaseTX	10/100/1000BaseTX	10/100/1000BaseTX	10/100/1000BaseTX
	NETWORK PROTOCOLS	TCP/IP, Net BEUI	TCP/IP, Net BEUI	TCP/IP, Net BEUI	TCP/IP, Net BEUI
	OPERATING SYSTEMS	Windows 8/8.1/10, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022	Windows 8/8.1/10, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022	Windows 8/8.1/10, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022	Windows 8/8.1/10, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022
SCAN	SCAN TYPE	CCD colour and b/w	CCD colour and b/w	CCD colour and b/w	CCD colour and b/w
	SCAN RESOLUTION	200, 300, 400, 600 dpi	200, 300, 400, 600 dpi	200, 300, 400, 600 dpi	200, 300, 400, 600 dpi
	INTERFACES	10/100/1000BaseTX	10/100/1000BaseTX	10/100/1000BaseTX	10/100/1000BaseTX
	NETWORK PROTOCOLS	TCP/IP	TCP/IP	TCP/IP	TCP/IP
FAX	ORIGINALS	max A3	max A3	max A3	max A3
	MODEM SPEED	33.6 kbps	33.6 kbps	33.6 kbps	33.6 kbps
	COMPRESSION METHOD	JBIG, MMR, MR, MH	JBIG, MMR, MR, MH	JBIG, MMR, MR, MH	JBIG, MMR, MR, MH
	ONE-TOUCH DIAL/ABBR. DIAL	1,000/2,000	1,000/2,000	1,000/2,000	1,000/2,000

A4 Multifunctional Systems

Optional features are marked in grey font.



		302ci	352ci	402ci	502ci
COPY	COPY SPEED	30 A4 pages/min. in colour and b/w	35 A4 pages/min. in colour and b/w	40 A4 pages/min. in colour and b/w	50 A4 pages/min. in colour and b/w
	COPY RESOLUTION	600 x 600 dpi	600 x 600 dpi	600 x 600 dpi	600 x 600 dpi
	GREYSCALES	256	256	256	256
	STANDARD PAPER FEED	600 (1 x 500 + 100 sheets)	600 (1 x 500 + 100 sheets)	600 (1 x 500 + 100 sheets)	600 (1 x 500 + 100 sheets)
	OPTIONAL PAPER FEED	1 x 500 + 2 x 500 or 1 x 2,000 sheets	1 x 500 + 2 x 500 or 1 x 2,000 sheets	1 x 500 + 2 x 500 or 1 x 2,000 sheets	1 x 500 + 2 x 500 or 1 x 2,000 sheets
	PAPER CAPACITY, MAX	3,100 sheets	3,100 sheets	3,100 sheets	3,100 sheets
	PAPER FORMAT	A6R-A4	A6R-A4	A6R-A4	A6R-A4
	ORIGINAL FEEDER	Standard	Option: DP-5100, DP-5120, DP-5130	Option: DP-5100, DP-5120, DP-5130	Option: DP-5100, DP-5120, DP-5130
	DUPLEX	Standard	Standard	Standard	Standard
	SYSTEM MEMORY	1.536 MB RAM (max. 3.072 MB RAM)	4 GB RAM, 16 GB SSD/320 GB HDD	4 GB RAM, 8 GB SSD, 320 GB HDD	4 GB RAM, 8 GB SSD, 320 GB HDD
ZOOM	25%-400%	25%-400%	25%-400%	25%-400%	
CABINET	Option: high Nr. 74, low Nr. 75	Option: high Nr. 74, low Nr. 75	Option: high Nr. 74, low Nr. 75	Option: high Nr. 74, low Nr. 75	
PRINT	TYPE	Integrated within the system	Integrated within the system	Integrated within the system	Integrated within the system
	INTERFACES	USB 2.0 (opt.), 10/100/1000BaseTX, USB host (2)	USB 2.0 (opt.), 10/100/1000BaseTX, USB-Host (3), NFC	USB 2.0 (opt.), 10/100/1000BaseTX, USB-Host (3), NFC	USB 2.0 (opt.), 10/100/1000BaseTX, USB-Host (3), NFC
	OPERATING SYSTEMS	Windows 8/8.1/10/11, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022, Linux, Chrome OS, Mac ex OS 10.9	Windows 8/8.1/10/11, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022, Linux, Chrome OS, Mac ex OS 10.9	Windows 7/8/8.1/10, Server 2003/2008 R2/2012 R2/2016/2019, Novell NetWare, Linux, Mac ex OS 10.9	Windows 8/8.1/10/11, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022, Linux, Chrome OS, Mac ex OS 10.9
EMULATIONS	PCL6 (5c, XL), KPDL 3 (PostScript 3 compatible), PRESCRIBE IIc, PDF 1.7, XPS, OpenXPS	PCL6 (5c, XL), KPDL 3 (PostScript 3 compatible), PRESCRIBE IIc, PDF 1.7, XPS, OpenXPS	PCL6 (5c, XL), KPDL 3 (PostScript 3 compatible), PRESCRIBE IIc, PDF 1.7, XPS, OpenXPS	PCL6 (5c, XL), KPDL 3 (PostScript 3 compatible), PRESCRIBE IIc, PDF 1.7, XPS, OpenXPS	
NETWORK	INTERFACES	10/100/1000BaseTX	10/100/1000BaseTX	10/100/1000BaseTX	10/100/1000BaseTX
	NETWORK PROTOCOLS	TCP/IP, Net BEUI	TCP/IP, Net BEUI	TCP/IP, Net BEUI	TCP/IP, Net BEUI
	OPERATING SYSTEMS	Windows 8/8.1/10, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022	Windows 8/8.1/10, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022	Windows 8/8.1/10, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022	Windows 8/8.1/10, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022
SCAN	SCAN TYPE	CCD colour and b/w	CCD colour and b/w	CCD colour and b/w	CCD colour and b/w
	SCAN RESOLUTION	200, 300, 400, 600 dpi	200, 300, 400, 600 dpi	200, 300, 400, 600 dpi	200, 300, 400, 600 dpi
	INTERFACES	10/100/1000BaseTX, USB 2.0	10/100/1000BaseTX, USB 2.0	10/100/1000BaseTX, USB 2.0	10/100/1000BaseTX, USB 2.0
	NETWORK PROTOCOLS	TCP/IP	TCP/IP	TCP/IP	TCP/IP
FAX	ORIGINALS	max A4	max A4	max A4	max A4
	MODEM SPEED	33,6 kbps	33,6 kbps	33,6 kbps	33,6 kbps
	COMPRESSION METHOD	JBIG, MMR, MR, MH	JBIG, MMR, MR, MH	JBIG, MMR, MR, MH	JBIG, MMR, MR, MH
	ONE-TOUCH DIAL/ABBR. DIAL	100/200	1,000/2,000	1,000/2,000	1,000/2,000

A4 Multifunctional Systems

Optional features are marked in grey font.



P-C2655w MFP

357ci

COPY	COPY SPEED	26 A4 pages/min in colour and b/w	35 A4 pages/min in colour and b/w
	COPY RESOLUTION	600 x 600 dpi	600 x 600 dpi
	GREYSCALES	256	256
	STANDARD PAPER FEED	300 (1 x 250 + 50 sheets)	350 (1 x 250 + 100 sheets)
	OPTIONAL PAPER FEED	1 x 250 sheets	3 x 500 sheets
	PAPER CAPACITY, MAX	550 sheets	1,850 sheets
	PAPER FORMAT	A6R-A4	A6R-A4
	ORIGINAL FEEDER	Standard (Duplex Scan)	Standard (Duplex Scan)
	DUPLEX	Standard	Standard
	SYSTEM MEMORY	512 MB RAM (max 1,536 MB)	1,024 MB RAM (max 3,072 MB RAM)
ZOOM	25%–400%	25%–400%	
CABINET	Option: no. 77	Option: high no. 72, low no. 73	
PRINT	TYPE	Integrated within the system	Integrated within the system
	INTERFACES	USB 2.0, 10/100/1000BaseTX, USB host, SD slot, Wi-Fi	USB 2.0, 10/100/1000BaseTX, USB host (2)
	OPERATING SYSTEMS	Windows 8/8.1/10/11, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022, Linux, Mac ex OS 10.9	Windows 8/8.1/10/11, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022, Linux, Chrome OS, Mac ex OS 10.9
EMULATIONS	PCL6 (5c, XL), KPDLL 3 (PostScript 3 compatible), PRESCRIBE IIc, PDF 1.7, XPS, Open XPS	PCL6 (5c, XL), KPDLL 3 (PostScript 3 compatible), PRESCRIBE IIc, PDF 1.7, XPS	
NETWORK	INTERFACES	10/100/1000BaseTX	10/100/1000BaseTX
	NETWORK PROTOCOLS	TCP/IP, Net BEUI	TCP/IP, Net BEUI
	OPERATING SYSTEMS	Windows 8/8.1/10, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022	Windows 8/8.1/10, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022
SCAN	SCAN TYPE	CIS colour and b/w	CCD colour and b/w
	SCAN RESOLUTION	200, 300, 400, 600 dpi	200, 300, 400, 600 dpi
	INTERFACES	10/100/1000BaseTX, USB 2.0	10/100/1000BaseTX, USB 2.0
	NETWORK PROTOCOLS	TCP/IP	TCP/IP
FAX	ORIGINALS	max A4	max A4
	MODEM SPEED	33.6 kbps	33.6 kbps
	COMPRESSION METHOD	JBIG, MMR, MR, MH	JBIG, MMR, MR, MH
	ONE-TOUCH DIAL/ABBR. DIAL	100/200	100/200

A4 Multifunctional Systems

Optional features are marked in grey font.



		P-C3062i MFP	P-C3066i MFP	P-C3562i MFP	P-C3566i MFP
COPY	COPY SPEED	30 A4 pages/min in colour and b/w	30 A4 pages/min in colour and b/w	35 A4 pages/min in colour and b/w	35 A4 pages/min in colour and b/w
	COPY RESOLUTION	600 x 600 dpi	600 x 600 dpi	600 x 600 dpi	600 x 600 dpi
	GREYSCALES	256	256	256	256
	STANDARD PAPER FEED	350 (1 x 250 + 100 sheets)	350 (1 x 250 + 100 sheets)	350 (1 x 250 + 100 sheets)	350 (1 x 250 + 100 sheets)
	OPTIONAL PAPER FEED	3 x 500 sheets	3 x 500 sheets	3 x 500 sheets	3 x 500 sheets
	PAPER CAPACITY, MAX	1,850 sheets	1,850 sheets	1,850 sheets	1,850 sheets
	PAPER FORMAT	A6R-A4	A6R-A4	A6R-A4	A6R-A4
	ORIGINAL FEEDER	Standard	Standard	Standard (Duplex Scan)	Standard (Duplex Scan)
	DUPLEX	Standard	Standard	Standard	Standard
	SYSTEM MEMORY	1,024 MB RAM (max 3,072 MB RAM)	1,024 MB RAM (max 3,072 MB RAM)	1,024 MB RAM (max 3,072 MB RAM)	1,024 MB RAM (max 3,072 MB RAM)
ZOOM	25%–400%	25%–400%	25%–400%	25%–400%	
CABINET	Option: high no. 72, low no. 73	Option: high no. 72, low no. 73	Option: high no. 72, low no. 73	Option: high no. 72, low no. 73	
PRINT	TYPE	Integrated within the system	Integrated within the system	Integrated within the system	Integrated within the system
	INTERFACES	USB 2.0, 10/100/1000BaseTX, USB host (2)	USB 2.0, 10/100/1000BaseTX, USB host (2)	USB 2.0, 10/100/1000BaseTX, USB host (2)	USB 2.0, 10/100/1000BaseTX, USB host (2)
	OPERATING SYSTEMS	Windows 8/8.1/10/11, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022, Linux, Chrome OS, Mac ex OS 10.9	Windows 8/8.1/10/11, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022, Linux, Chrome OS, Mac ex OS 10.9	Windows 8/8.1/10/11, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022, Linux, Chrome OS, Mac ex OS 10.9	Windows 8/8.1/10/11, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022, Linux, Chrome OS, Mac ex OS 10.9
	EMULATIONS	PCL6 (5c, XL), KPDL 3 (PostScript 3 compatible), PRESCRIBE IIc, PDF 1.7, XPS	PCL6 (5c, XL), KPDL 3 (PostScript 3 compatible), PRESCRIBE IIc, PDF 1.7, XPS	PCL6 (5c, XL), KPDL 3 (PostScript 3 compatible), PRESCRIBE IIc, PDF 1.7, XPS	PCL6 (5c, XL), KPDL 3 (PostScript 3 compatible), PRESCRIBE IIc, PDF 1.7, XPS
NETWORK	INTERFACES	10/100/1000BaseTX	10/100/1000BaseTX	10/100/1000BaseTX	10/100/1000BaseTX
	NETWORK PROTOCOLS	TCP/IP, Net BEUI	TCP/IP, Net BEUI	TCP/IP, Net BEUI	TCP/IP, Net BEUI
	OPERATING SYSTEMS	Windows 8/8.1/10, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022	Windows 8/8.1/10, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022	Windows 8/8.1/10, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022	Windows 8/8.1/10, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022
SCAN	SCAN TYPE	CCD colour and b/w	CCD colour and b/w	CCD colour and b/w	CCD colour and b/w
	SCAN RESOLUTION	200, 300, 400, 600 dpi	200, 300, 400, 600 dpi	200, 300, 400, 600 dpi	200, 300, 400, 600 dpi
	INTERFACES	10/100/1000BaseTX, USB 2.0	10/100/1000BaseTX, USB 2.0	10/100/1000BaseTX, USB 2.0	10/100/1000BaseTX, USB 2.0
	NETWORK PROTOCOLS	TCP/IP	TCP/IP	TCP/IP	TCP/IP
FAX	ORIGINALS	--	max A4	--	max A4
	MODEM SPEED	--	33.6 kbps	--	33.6 kbps
	COMPRESSION METHOD	--	JBIG, MMR, MR, MH	--	JBIG, MMR, MR, MH
	ONE-TOUCH DIAL/ABBR. DIAL	--	100/200	--	100/200

A4 Print Systems



P-C2650DW

PRINT FORMAT	A6R-A4
PRINT SPEED	26 A4 pages/min in colour and b/w
PRINT RESOLUTION	600 x 600 dpi, 9,600 x 600 dpi level, 1,200 x 1,200 dpi (reduced speed)
STANDARD PAPER FEED	300 (1 x 250 + 50 sheets)
OPTIONAL PAPER FEED	1 x 250 sheets
DUPLEX	Standard
PROCESSOR	Cortex-A9 / 800 MHz
PRINT MEMORY	512 MB (max 512 MB)
INTERFACES	USB 2.0, 10/100/1000BaseTX, USB host, SD slot, Wi-Fi
NETWORK CARD OPTIONAL	--
EMULATIONS	PCL6 (5c, XL), KPDL 3 (PostScript 3 compatible), PRESCRIBE IIc, PDF 1.7, XPS, Open XPS



P-C3062DN

PRINT FORMAT	A6R-A4
PRINT SPEED	30 A4 pages/min in colour and b/w
PRINT RESOLUTION	600 x 600 dpi, max 1,200 x 1,200 dpi (reduced speed)
STANDARD PAPER FEED	600 (1 x 500 + 100 sheets)
OPTIONAL PAPER FEED	3 x 500 sheets
DUPLEX	Standard
PROCESSOR	ARM Cortex-A9 dual core/1.2 GHz
PRINT MEMORY	1,024 MB (max 1,024 MB)
INTERFACES	USB 2.0, 10/100/1000BaseTX, USB host (2)
NETWORK CARD OPTIONAL	IB-50 Gigabit Ethernet, IB-36/IB-51 WLAN card
EMULATIONS	PCL6 (5c, XL), KPDL 3 (PostScript 3 compatible), PRESCRIBE IIc, PDF 1.7, XPS



P-C3562DN

PRINT FORMAT	A6R-A4
PRINT SPEED	35 A4 pages/min in colour and b/w
PRINT RESOLUTION	600 x 600 dpi, max 1,200 x 1,200 dpi (reduced speed)
STANDARD PAPER FEED	600 (1 x 500 + 100 sheets)
OPTIONAL PAPER FEED	3 x 500 sheets
DUPLEX	Standard
PROCESSOR	ARM Cortex-A9 dual core/1.2 GHz
PRINT MEMORY	1,024 MB (max 3,072 MB)
INTERFACES	USB 2.0, 10/100/1000BaseTX, USB host (2)
NETWORK CARD OPTIONAL	IB-50 Gigabit Ethernet, IB-36/IB-51 WLAN card
EMULATIONS	PCL6 (5c, XL), KPDL 3 (PostScript 3 compatible), PRESCRIBE IIc, PDF 1.7, XPS

P-C4072DN

PRINT FORMAT	A6R-A4
PRINT SPEED	40 A4 pages/min in colour and b/w
PRINT RESOLUTION	600 x 600 dpi, max 1,200 x 1,200 dpi (reduced speed)
STANDARD PAPER FEED	600 (1 x 500 + 100 sheets)
OPTIONAL PAPER FEED	3 x 500 sheets
DUPLEX	Standard
PROCESSOR	ARM Cortex-A9 dual core/1.2 GHz
PRINT MEMORY	1,024 MB (max 3,072 MB)
INTERFACES	USB 2.0, 10/100/1000BaseTX, USB host (2)
NETWORK CARD OPTIONAL	IB-50 Gigabit Ethernet, IB-36/IB-51 WLAN card
EMULATIONS	PCL6 (5c, XL), KPDL 3 (PostScript 3 compatible), PRESCRIBE IIc, PDF 1.7, XPS

A3 Multifunctional Systems

Optional features are marked in grey font.



		P-2540i MFP	3263i	4063i
COPY	COPY SPEED	25 A4 / 12 A3 pages/min	32 A4 / 17 A3 pages/min	40 A4 / 21 A3 pages/min
	COPY RESOLUTION	600 x 600 dpi	600 x 600 dpi	600 x 600 dpi
	GREYSCALES	256	256	256
	STANDARD PAPER FEED	600 (1 x 500 + 100 sheets)	1,100 (2 x 500 + 100 sheets)	1,100 (2 x 500 + 100 sheets)
	OPTIONAL PAPER FEED	1 or 2 x 500 sheets	2 x 500 sheets or 2 x 1,500 sheets	2 x 500 sheets or 2 x 1,500 sheets
	PAPER CAPACITY, MAX	1,600 sheets	4,100 sheets	4,100 sheets
	PAPER FORMAT	A6R-A3	A6R-A3	A6R-A3
	ORIGINAL FEEDER	Standard	Option: DP-7140, DP-7150, DP-7160 or DP-7170	Option: DP-7140, DP-7150, DP-7160 or DP-7170
	DUPLEX	Standard	Standard	Standard
	SYSTEM MEMORY	1 GB (max 3 GB)	4 GB RAM, 32 GB SSD / 320 GB or 1 TB HDD	4 GB RAM, 32 GB SSD / 320 GB or 1 TB HDD
ZOOM	25%-400%	25%-400%	25%-400%	
CABINET	Option: no. 22	Option: no. 70	Option: no. 70	
PRINT	TYPE	Integrated within the system	Integrated within the system	Integrated within the system
	INTERFACES	USB 2.0, 10/100/1000BaseTX, USB host (2), NFC, Wi-Fi	USB 3.0, USB 2.0, 10/100/1000BaseTX, USB-host, NFC	USB 3.0, USB 2.0, 10/100/1000BaseTX, USB-host, NFC
	OPERATING SYSTEMS	Windows 8/8.1/10/11, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022, Linux, Chrome OS, Mac ex OS 10.9	Windows 8/8.1/10/11, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022, Linux, Chrome OS, Mac ex OS 10.9	Windows 8/8.1/10/11, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022, Linux, Chrome OS, Mac ex OS 10.9
EMULATIONS	PCL6 (5c, XL), KPDL 3 (PostScript 3 compatible), XPS, PRESCRIBE IIe, PDF 1.7	PCL6 (5e, XL), KPDL 3 (PostScript 3 compatible), PRESCRIBE IIe, XPS	PCL6 (5e, XL), KPDL 3 (PostScript 3 compatible), PRESCRIBE IIe, XPS	
NETWORK	INTERFACES	10/100/1000BaseTX	10/100/1000BaseTX	10/100/1000BaseTX
	NETWORK PROTOCOLS	TCP/IP, Net BEUI	TCP/IP, Net BEUI	TCP/IP, Net BEUI
	OPERATING SYSTEMS	Windows 8/8.1/10, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022	Windows 8/8.1/10, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022	Windows 8/8.1/10, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022
SCAN	SCAN TYPE	CIS colour and b/w	CCD colour and b/w	CCD colour and b/w
	SCAN RESOLUTION	200, 300, 400, 600 dpi	200, 300, 400, 600 dpi	200, 300, 400, 600 dpi
	INTERFACES	10/100/1000BaseTX, USB 2.0	10/100/1000BaseTX	10/100/1000BaseTX
	NETWORK PROTOCOLS	TCP/IP	TCP/IP	TCP/IP
FAX	ORIGINALS	max A3	max A3	max A3
	MODEM SPEED	33.6 kbps	33.6 kbps	33.6 kbps
	COMPRESSION METHOD	JBIG, MMR, MR, MH	JBIG, MMR, MR, MH	JBIG, MMR, MR, MH
	ONE-TOUCH DIAL/ABBR. DIAL	100/200	1,000/2,000	1,000/2,000

A3 Multifunctional Systems

Optional features are marked in grey font.



		5058i	6058i	7058i	8057i
COPY	COPY SPEED	50 A4 / 25 A3 pages/min	60 A4 / 30 A3 pages/min	70 A4 / 35 A3 pages/min	80 A4 / 40 A3 pages/min
	COPY RESOLUTION	600 x 600 dpi	600 x 600 dpi	600 x 600 dpi	600 x 600 dpi
	GREYSCALES	256	256	256	256
	STANDARD PAPER FEED	1,150 (2 x 500 + 150 sheets)	1,150 (2 x 500 + 150 sheets)	1,150 (2 x 500 + 150 sheets)	4,150 (2 x 500 + 2 x 1,500 + 150 sheets)
	OPTIONAL PAPER FEED	2 x 500, 2 x 1,500, 3,000 sheets, different combinations possible	2 x 500, 2 x 1,500, 3,000 sheets, different combinations possible	2 x 500, 2 x 1,500, 3,000 sheets, different combinations possible	2 x 500, 2 x 1,500, 3,000 sheets, different combinations possible
	PAPER CAPACITY, MAX	7,150 sheets	7,650 sheets	7,650 sheets	7,650 sheets
	PAPER FORMAT	A6R-SRA3/A3+	A6R-SRA3/A3+	A6R-SRA3/A3+	A6R-A3+
	ORIGINAL FEEDER	Option: DP-7150, DP-7160 or DP-7170	Option: DP-7150, DP-7160 or DP-7170	Option: DP-7150, DP-7160 or DP-7170	Standard (dual scan with multi-feed detection)
	DUPLEX	Standard	Standard	Standard	Standard
	SYSTEM MEMORY	4 GB RAM, 64 GB SSD/320 GB HDD or 1 TB	4 GB RAM, 64 GB SSD/320 GB HDD or 1 TB	4 GB RAM, 64 GB SSD/320 GB HDD or 1 TB	4.5 GB RAM, 8 GB SSD/320 GB HDD
ZOOM	25%–400%	25%–400%	25%–400%	25%–400%	
CABINET	Option: no. 81	Option: no. 81	Option: no. 81	--	
PRINT	TYPE	Integrated within the system	Integrated within the system	Integrated within the system	Integrated within the system
	INTERFACES	USB 3.0, USB 2.0, 10/100/1000BaseTX, USB host, NFC	USB 3.0, USB 2.0, 10/100/1000BaseTX, USB host, NFC	USB 3.0, USB 2.0, 10/100/1000BaseTX, USB host, NFC	USB 2.0, 10/100/1000BaseTX, USB host, NFC
	OPERATING SYSTEMS	Windows 8/8.1/10/11, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022, Linux, Chrome OS, Mac ex OS 10.9	Windows 8/8.1/10/11, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022, Linux, Chrome OS, Mac ex OS 10.9	Windows 8/8.1/10/11, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022, Linux, Chrome OS, Mac ex OS 10.9	Windows 8/8.1/10/11, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022, Linux, Chrome OS, Mac ex OS 10.9
EMULATIONS	PCL6 (5e, XL), KPDL 3 (PostScript 3 compatible), PRESCRIBE IIe, PDF 2.0, XPS	PCL6 (5e, XL), KPDL 3 (PostScript 3 compatible), PRESCRIBE IIe, PDF 2.0, XPS	PCL6 (5e, XL), KPDL 3 (PostScript 3 compatible), PRESCRIBE IIe, PDF 2.0, XPS	PCL6 (5e, XL), KPDL 3 (PostScript 3 compatible), PRESCRIBE IIe, XPS	
NETWORK	INTERFACES	10/100/1000BaseTX	10/100/1000BaseTX	10/100/1000BaseTX	10/100/1000BaseTX
	NETWORK PROTOCOLS	TCP/IP, Net BEUI	TCP/IP, Net BEUI	TCP/IP, Net BEUI	TCP/IP, Net BEUI
	OPERATING SYSTEMS	Windows 8/8.1/10, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022	Windows 8/8.1/10, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022	Windows 8/8.1/10, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022	Windows 8/8.1/10, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022
SCAN	SCAN TYPE	CCD colour and b/w	CCD colour and b/w	CCD colour and b/w	CCD colour and b/w
	SCAN RESOLUTION	200, 300, 400, 600 dpi	200, 300, 400, 600 dpi	200, 300, 400, 600 dpi	200, 300, 400, 600 dpi
	INTERFACES	10/100/1000BaseTX	10/100/1000BaseTX	10/100/1000BaseTX	10/100/1000BaseTX
	NETWORK PROTOCOLS	TCP/IP	TCP/IP	TCP/IP	TCP/IP
FAX	ORIGINALS	max A3	max A3	max A3	max A3
	MODEM SPEED	33.6 kbps	33.6 kbps	33.6 kbps	33.6 kbps
	COMPRESSION METHOD	JBIG, MMR, MR, MH	JBIG, MMR, MR, MH	JBIG, MMR, MR, MH	JBIG, MMR, MR, MH
	ONE-TOUCH DIAL/ABBR. DIAL	1,000/2,000	1,000/2,000	1,000/2,000	1,000/2,000

A4 Multifunctional Systems



P-3521 MFP

P-3527w MFP

COPY	COPY SPEED	35 A4 pages/min	35 A4 pages/min
	COPY RESOLUTION	600 x 600 dpi	600 x 600 dpi
	GREYSCALES	256	256
	STANDARD PAPER FEED	350 (1 x 250 + 100 sheets)	350 (1 x 250 + 100 sheets)
	OPTIONAL PAPER FEED	2 x 250 sheets	2 x 250 sheets
	PAPER CAPACITY, MAX	850 sheets	850 sheets
	PAPER FORMAT	A6R-A4	A6R-A4
	ORIGINAL FEEDER	Standard	Standard
	DUPLEX	Standard	Standard
	SYSTEM MEMORY	512 MB RAM (max 1,536 MB RAM)	512 MB RAM (max 1,536 MB RAM)
ZOOM	25%–400%	25%–400%	
CABINET	Option: no. 78	Option: no. 78	
PRINT	TYPE	Integrated within the system	Integrated within the system
	INTERFACES	10/100/1000BaseTX, USB 2.0, USB host, SD slot	10/100/1000BaseTX, USB 2.0, USB host, SD slot, Wi-Fi
	OPERATING SYSTEMS	Windows 8/8.1/10/11, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022, Linux, Mac ex OS 10.9	Windows 8/8.1/10/11, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022, Linux, Mac ex OS 10.9
EMULATIONS	PCL6 (5e, XL), KPD L 3 (PostScript 3 compatible), PRESCRIBE IIe, Line Printer, IBM Proprinter, Epson LQ-850, PDF 1.7, XPS, Open XPS	PCL6 (5e, XL), KPD L 3 (PostScript 3 compatible), PRESCRIBE IIe, Line Printer, IBM Proprinter, Epson LQ-850, PDF 1.7, XPS, Open XPS	
NETWORK	INTERFACES	10/100/1000BaseTX	10/100/1000BaseTX
	NETWORK PROTOCOLS	TCP/IP, Net BEUI	TCP/IP, Net BEUI
	OPERATING SYSTEMS	Windows 8/8.1/10, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022	Windows 8/8.1/10, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022
SCAN	SCAN TYPE	CIS colour and b/w	CIS colour and b/w
	SCAN RESOLUTION	200, 300, 400, 600 dpi	200, 300, 400, 600 dpi
	INTERFACES	10/100/1000BaseTX, USB 2.0	10/100/1000BaseTX, USB 2.0
	NETWORK PROTOCOLS	TCP/IP	TCP/IP
FAX	ORIGINALS	--	max A4
	MODEM SPEED	--	33.6 kbps
	COMPRESSION METHOD	--	JBIG, MMR, MR, MH
	ONE-TOUCH DIAL/ABBR. DIAL	--	100/200

A4 Multifunctional Systems



P-4020 MFP

		P-4020 MFP
COPY	COPY SPEED	40 A4 pages/min
	COPY RESOLUTION	600 x 600 dpi
	GREYSCALES	256
	STANDARD PAPER FEED	350 (1 x 250 + 100 sheets)
	OPTIONAL PAPER FEED	2 x 250 sheets
	PAPER CAPACITY, MAX	850 sheets
	PAPER FORMAT	A6R-A4
	ORIGINAL FEEDER	Standard (Duplex Scan)
	DUPLEX	Standard
	SYSTEM MEMORY	512 MB RAM (max 1,536 MB RAM)
ZOOM	25%–400%	
CABINET	Option: no. 78	
PRINT	TYPE	Integrated within the system
	INTERFACES	10/100/1000BaseTX, USB 2.0, USB host, SD slot
	OPERATING SYSTEMS	Windows 8/8.1/10/11, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022, Linux, Chrome OS, Mac ex OS 10.9
EMULATIONS	PCL6 (5e, XL), KPD L 3 (PostScript 3 compatible), PRESCRIBE IIe, Line Printer, IBM Proprinter, Epson LQ-850, PDF 1.7, XPS, Open XPS	
NETWORK	INTERFACES	10/100/1000BaseTX
	NETWORK PROTOCOLS	TCP/IP, Net BEUI
	OPERATING SYSTEMS	Windows 8/8.1/10, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022
SCAN	SCAN TYPE	CIS colour and b/w
	SCAN RESOLUTION	200, 300, 400, 600 dpi
	INTERFACES	10/100/1000BaseTX, USB 2.0
	NETWORK PROTOCOLS	TCP/IP
FAX	ORIGINALS	--
	MODEM SPEED	--
	COMPRESSION METHOD	--
	ONE-TOUCH DIAL/ABBR. DIAL	--

P-4025w MFP

		P-4025w MFP
COPY	COPY SPEED	40 A4 pages/min
	COPY RESOLUTION	600 x 600 dpi
	GREYSCALES	256
	STANDARD PAPER FEED	350 (1 x 250 + 100 sheets)
	OPTIONAL PAPER FEED	2 x 250 sheets
	PAPER CAPACITY, MAX	850 sheets
	PAPER FORMAT	A6R-A4
	ORIGINAL FEEDER	Standard (Duplex Scan)
	DUPLEX	Standard
	SYSTEM MEMORY	512 MB RAM (max 1,536 MB RAM)
ZOOM	25%–400%	
CABINET	Option: no. 78	
PRINT	TYPE	Integrated within the system
	INTERFACES	10/100/1000BaseTX, USB 2.0, USB host, SD slot, Wi-Fi
	OPERATING SYSTEMS	Windows 8/8.1/10/11, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022, Linux, Mac ex OS 10.9
EMULATIONS	PCL6 (5e, XL), KPD L 3 (PostScript 3 compatible), PRESCRIBE IIe, Line Printer, IBM Proprinter, Epson LQ-850, PDF 1.7, XPS, Open XPS	
NETWORK	INTERFACES	10/100/1000BaseTX
	NETWORK PROTOCOLS	TCP/IP, Net BEUI
	OPERATING SYSTEMS	Windows 8/8.1/10, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022
SCAN	SCAN TYPE	CIS colour and b/w
	SCAN RESOLUTION	200, 300, 400, 600 dpi
	INTERFACES	10/100/1000BaseTX, USB 2.0
	NETWORK PROTOCOLS	TCP/IP
FAX	ORIGINALS	max A4
	MODEM SPEED	33.6 kbps
	COMPRESSION METHOD	JBIG, MMR, MR, MH
	ONE-TOUCH DIAL/ABBR. DIAL	100/200



P-4026iw MFP

		P-4026iw MFP
COPY	COPY SPEED	40 A4 pages/min
	COPY RESOLUTION	600 x 600 dpi
	GREYSCALES	256
	STANDARD PAPER FEED	350 (1 x 250 + 100 sheets)
	OPTIONAL PAPER FEED	2 x 250 sheets
	PAPER CAPACITY, MAX	850 sheets
	PAPER FORMAT	A6R-A4
	ORIGINAL FEEDER	Standard (Duplex Scan)
	DUPLEX	Standard
	SYSTEM MEMORY	512 MB RAM (max 1,536 MB RAM)
ZOOM	25%–400%	
CABINET	Option: no. 78	
PRINT	TYPE	Integrated within the system
	INTERFACES	10/100/1000BaseTX, USB 2.0, USB host, SD slot, Wi-Fi
	OPERATING SYSTEMS	Windows 8/8.1/10/11, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022, Linux, Chrome OS, Mac ex OS 10.9
EMULATIONS	PCL6 (5e, XL), KPD L 3 (PostScript 3 compatible), PRESCRIBE IIe, Line Printer, IBM Proprinter, Epson LQ-850, PDF 1.7, XPS, Open XPS	
NETWORK	INTERFACES	10/100/1000BaseTX
	NETWORK PROTOCOLS	TCP/IP, Net BEUI
	OPERATING SYSTEMS	Windows 8/8.1/10, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022
SCAN	SCAN TYPE	CIS colour and b/w
	SCAN RESOLUTION	200, 300, 400, 600 dpi
	INTERFACES	10/100/1000BaseTX, USB 2.0
	NETWORK PROTOCOLS	TCP/IP
FAX	ORIGINALS	max A4
	MODEM SPEED	33.6 kbps
	COMPRESSION METHOD	JBIG, MMR, MR, MH
	ONE-TOUCH DIAL/ABBR. DIAL	100/200

A4 Multifunctional Systems

Optional features are marked in grey font.



		P-4531i MFP	P-4536i MFP	P-4531i MFP	P-4536i MFP
COPY	COPY SPEED	45 A4 pages/min	45 A4 pages/min	45 A4 pages/min	45 A4 pages/min
	COPY RESOLUTION	600 x 600 dpi	600 x 600 dpi	600 x 600 dpi	600 x 600 dpi
	GREYSCALES	256	256	256	256
	STANDARD PAPER FEED	600 (1 x 500 + 100 sheets)	600 (1 x 500 + 100 sheets)	600 (1 x 500 + 100 sheets)	600 (1 x 500 + 100 sheets)
	OPTIONAL PAPER FEED	4 x 500 sheets	4 x 500 sheets	4 x 500 sheets	4 x 500 sheets
	PAPER CAPACITY, MAX	2,600 sheets	2,600 sheets	2,600 sheets	2,600 sheets
	PAPER FORMAT	A6R-A4	A6R-A4	A6R-A4	A6R-A4
	ORIGINAL FEEDER	Standard	Standard	Standard	Standard
	DUPLEX	Standard	Standard	Standard	Standard
	SYSTEM MEMORY	1 GB RAM, (max 3 GB RAM), 32/64/128/256/512 GB SSD	1 GB RAM, (max 3 GB RAM), 32/64/128/256/512 GB SSD	1 GB RAM, (max 3 GB RAM), 32/64/128/256/512 GB SSD	1 GB RAM, (max 3 GB RAM), 32/64/128/256/512 GB SSD
ZOOM	25%–400%	25%–400%	25%–400%	25%–400%	
CABINET	Option: high no. 79, low no. 80	Option: high no. 79, low no. 80	Option: high no. 79, low no. 80	Option: high no. 79, low no. 80	
PRINT	TYPE	Integrated within the system	Integrated within the system	Integrated within the system	Integrated within the system
	INTERFACES	USB 2.0, 10/100/1000BaseTX, USB host	USB 2.0, 10/100/1000BaseTX, USB host	USB 2.0, 10/100/1000BaseTX, USB host	USB 2.0, 10/100/1000BaseTX, USB host
	OPERATING SYSTEMS	Windows 8/8.1/10/11, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022, Linux, Chrome OS, Mac ex OS 10.9	Windows 8/8.1/10/11, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022, Linux, Chrome OS, Mac ex OS 10.9	Windows 8/8.1/10/11, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022, Linux, Chrome OS, Mac ex OS 10.9	Windows 8/8.1/10/11, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022, Linux, Chrome OS, Mac ex OS 10.9
	EMULATIONS	PCL6 (5e, XL), KPDL 3 (PostScript 3 compatible), PRESCRIBE IIe, Line Printer, IBM Proprinter X24E, Epson LQ-850, PDF 1.7, XPS	PCL6 (5e, XL), KPDL 3 (PostScript 3 compatible), PRESCRIBE IIe, Line Printer, IBM Proprinter X24E, Epson LQ-850, PDF 1.7, XPS	PCL6 (5e, XL), KPDL 3 (PostScript 3 compatible), PRESCRIBE IIe, Line Printer, IBM Proprinter X24E, Epson LQ-850, PDF 1.7, XPS	PCL6 (5e, XL), KPDL 3 (PostScript 3 compatible), PRESCRIBE IIe, Line Printer, IBM Proprinter X24E, Epson LQ-850, PDF 1.7, XPS
NETWORK	INTERFACES	10/100/1000BaseTX	10/100/1000BaseTX	10/100/1000BaseTX	10/100/1000BaseTX
	NETWORK PROTOCOLS	TCP/IP, Net BEUI	TCP/IP, Net BEUI	TCP/IP, Net BEUI	TCP/IP, Net BEUI
	OPERATING SYSTEMS	Windows 8/8.1/10, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022	Windows 8/8.1/10, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022	Windows 8/8.1/10, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022	Windows 8/8.1/10, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022
SCAN	SCAN TYPE	CCD colour and b/w	CCD colour and b/w	CCD colour and b/w	CCD colour and b/w
	SCAN RESOLUTION	200, 300, 400, 600 dpi	200, 300, 400, 600 dpi	200, 300, 400, 600 dpi	200, 300, 400, 600 dpi
	INTERFACES	10/100/1000BaseTX, USB 2.0	10/100/1000BaseTX, USB 2.0	10/100/1000BaseTX, USB 2.0	10/100/1000BaseTX, USB 2.0
	NETWORK PROTOCOLS	TCP/IP	TCP/IP	TCP/IP	TCP/IP
FAX	ORIGINALS	--	max A4	--	max A4
	MODEM SPEED	--	33.6 kbps	--	33.6 kbps
	COMPRESSION METHOD	--	JBIG, MMR, MR, MH	--	JBIG, MMR, MR, MH
	ONE-TOUCH DIAL/ABBR. DIAL	--	22/100	--	100/200

A4 Multifunctional Systems



Optional features are marked in grey font.

*P-6038if MFP comes standard with a 250 sheet staple finisher and optionally has a 320 GB hard drive and a Trusted Platform module

		P-5536i MFP	P-6038i MFP	P-6038if MFP*
COPY	COPY SPEED	55 A4 pages/min	60 A4 pages/min	60 A4 pages/min
	COPY RESOLUTION	600 x 600 dpi	600 x 600 dpi	600 x 600 dpi
	GREYSCALES	256	256	256
	STANDARD PAPER FEED	600 (1 x 500 + 100 sheets)	600 (1 x 500 + 100 sheets)	600 (1 x 500 + 100 sheets)
	OPTIONAL PAPER FEED	4 x 500 sheets	4 x 500 sheets	4 x 500 sheets
	PAPER CAPACITY, MAX	2,600 sheets	2,600 sheets	2,600 sheets
	PAPER FORMAT	A6R-A4	A6R-A4	A6R-A4
	ORIGINAL FEEDER	Standard (Duplex Scan)	Standard (dual scan with multi-feed detection)	Standard (dual scan with multi-feed detection)
	DUPLEX	Standard	Standard	Standard
	SYSTEM MEMORY	1 GB RAM (max 3 GB RAM), 32/64/128/256/512 GB SSD	1 GB RAM (max 3 GB RAM), 32/64/128/256/512 GB SSD	1 GB RAM (max 3 GB RAM), 32/64/128/256/512 GB SSD
ZOOM	25%–400%	25%–400%	25%–400%	
CABINET	Option: high no. 79, low no. 80	Option: high no. 79, low no. 80	Option: high no. 79, low no. 80	
PRINT	TYPE	Integrated within the system	Integrated within the system	Integrated within the system
	INTERFACES	USB 2.0, 10/100/1000BaseTX, USB host	USB 2.0, 10/100/1000BaseTX, USB host, SD slot	USB 2.0, 10/100/1000BaseTX, USB host, SD slot
	OPERATING SYSTEMS	Windows 8/8.1/10/11, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022, Linux, Chrome OS, Mac ex OS 10.9	Windows 8/8.1/10/11, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022, Linux, Chrome OS, Mac ex OS 10.9	Windows 8/8.1/10/11, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022, Linux, Chrome OS, Mac ex OS 10.9
EMULATIONS	PCL6 (5e, XL), KPDL 3 (PostScript 3 compatible), PRESCRIBE IIe, Line Printer, IBM Proprinter X24E, Epson LQ-850, PDF 1.7, XPS	PCL6 (5e, XL), KPDL 3 (PostScript 3 compatible), PRESCRIBE IIe, Line Printer, IBM Proprinter X24E, Epson LQ-850, PDF 1.7, XPS	PCL6 (5e, XL), KPDL 3 (PostScript 3 compatible), PRESCRIBE IIe, Line Printer, IBM Proprinter X24E, Epson LQ-850, PDF 1.7, XPS	
NETWORK	INTERFACES	10/100/1000BaseTX	10/100/1000BaseTX	10/100/1000BaseTX
	NETWORK PROTOCOLS	TCP/IP, Net BEUI	TCP/IP, Net BEUI	TCP/IP, Net BEUI
	OPERATING SYSTEMS	Windows 8/8.1/10, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022	Windows 8/8.1/10, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022	Windows 8/8.1/10, Server 2008/2008 R2/2012/2012 R2/2016/2019/2022
SCAN	SCAN TYPE	CCD colour and b/w	CCD colour and b/w	CCD colour and b/w
	SCAN RESOLUTION	200, 300, 400, 600 dpi	200, 300, 400, 600 dpi	200, 300, 400, 600 dpi
	INTERFACES	10/100/1000BaseTX, USB 2.0	10/100/1000BaseTX, USB 2.0	10/100/1000BaseTX, USB 2.0
	NETWORK PROTOCOLS	TCP/IP	TCP/IP	TCP/IP
FAX	ORIGINALS	max A4	max A4	max A4
	MODEM SPEED	33.6 kbps	33.6 kbps	33.6 kbps
	COMPRESSION METHOD	JBIG, MMR, MR, MH	JBIG, MMR, MR, MH	JBIG, MMR, MR, MH
	ONE-TOUCH DIAL/ABBR. DIAL	100/200	100/200	100/200

A3 Print Systems



P-6040DN

PRINT FORMAT	A6R-SRA3
PRINT SPEED	60 A4 / 30 A3 pages/min
PRINT RESOLUTION	1,200 x 1,200 dpi
STANDARD PAPER FEED	1,150 (2 x 500 + 150 sheets)
OPTIONAL PAPER FEED	2 x 500, 2 x 1,500, 3,000 sheets
DUPLEX	Standard
PROCESSOR	Freescale QoriQ T1024 (Dual Core) 1.2 GHz
PRINT MEMORY	4 GB RAM, 8 GB SSD, 320 GB HDD
INTERFACES	USB 2.0, USB host, 10/100/1000BaseTX, NFC
INTERFACES OPTIONAL	--
EMULATIONS	PCL6 (5e, XL), KPDL 3 (PostScript 3 compatible), PDF 1.7, PRESCRIBE IIe, XPS

A4 Print Systems



P-3522DW

PRINT FORMAT	A6R-A4
PRINT SPEED	35 A4 pages/min
PRINT RESOLUTION	600 x 600 dpi, 1,200 x 1,200 dpi
STANDARD PAPER FEED	350 (250 + 100 sheets)
OPTIONAL PAPER FEED	2 x 250 sheets
DUPLEX	Standard
PROCESSOR	Cortex-A9 / 800 MHz
PRINT MEMORY	256 MB (max 256 MB)
INTERFACES	10/100/1000BaseTX, USB 2.0, USB host, SD slot, Wi-Fi
INTERFACES OPTIONAL	--
EMULATIONS	PCL6 (5e, XL), KPDL 3 (PostScript 3 compatible), PRESCRIBE IIe, Line Printer, IBM Proprinter, Epson LQ-850, PDF 1.7, XPS, Open XPS



P-4020DN

PRINT FORMAT	A6R-A4
PRINT SPEED	40 A4 pages/min
PRINT RESOLUTION	600 x 600 dpi, 1,200 x 1,200 dpi
STANDARD PAPER FEED	350 (250 + 100 sheets)
OPTIONAL PAPER FEED	2 x 250 sheets
DUPLEX	Standard
PROCESSOR	Cortex-A9 / 800 MHz
PRINT MEMORY	256 MB (max 256 MB)
INTERFACES	10/100/1000BaseTX, USB 2.0, USB host, SD slot
INTERFACES OPTIONAL	--
EMULATIONS	PCL6 (5e, XL), KPDL 3 (PostScript 3 compatible), PRESCRIBE IIe, Line Printer, IBM Proprinter, Epson LQ-850, PDF 1.7, XPS, Open XPS

P-4020DW

PRINT FORMAT	A6R-A4
PRINT SPEED	40 A4 pages/min
PRINT RESOLUTION	600 x 600 dpi, 1,200 x 1,200 dpi
STANDARD PAPER FEED	350 (250 + 100 sheets)
OPTIONAL PAPER FEED	2 x 250 sheets
DUPLEX	Standard
PROCESSOR	Cortex-A9 / 800 MHz
PRINT MEMORY	256 MB (max 256 MB)
INTERFACES	10/100/1000BaseTX, USB 2.0, USB host, SD slot, Wi-Fi
INTERFACES OPTIONAL	--
EMULATIONS	PCL6 (5e, XL), KPDL 3 (PostScript 3 compatible), PRESCRIBE IIe, Line Printer, IBM Proprinter, Epson LQ-850, PDF 1.7, XPS, Open XPS



P-4532DN

PRINT FORMAT	A6R-A4
PRINT SPEED	45 A4 pages/min
PRINT RESOLUTION	1,200 x 1,200 dpi
STANDARD PAPER FEED	600 (500 + 100 sheets)
OPTIONAL PAPER FEED	4 x 500 sheets
DUPLEX	Standard
PROCESSOR	Cortex-A9 / 1.2 GHz
PRINT MEMORY	512 MB (max 2.5 GB)
INTERFACES	10/100/1000BaseTX, USB 2.0, USB host (2), SD slot
INTERFACES OPTIONAL	IEEE 1284 parallel, 10/100/1000BaseTX, WLAN card
EMULATIONS	PCL6 (5e, XL), KPDL 3 (PostScript 3 compatible), PRESCRIBE IIe, Line Printer, IBM Proprinter, XPS, Open XPS



P-5032DN


PRINT FORMAT	A6R-A4
PRINT SPEED	50 A4 pages/min
PRINT RESOLUTION	1,200 x 1,200 dpi
STANDARD PAPER FEED	600 (500 + 100 sheets)
OPTIONAL PAPER FEED	4 x 500 sheets
DUPLEX	Standard
PROCESSOR	Cortex-A9 / 1.2 GHz
PRINT MEMORY	512 MB (max 2.5 GB)
INTERFACES	10/100/1000BaseTX, USB 2.0, USB host (2), SD slot
INTERFACES OPTIONAL	IEEE 1284 parallel, 10/100/1000BaseTX, WLAN card
EMULATIONS	PCL6 (5e, XL), KPDL 3 (PostScript 3 compatible), PRESCRIBE IIe, Line Printer, IBM Proprinter, XPS, Open XPS

P-5532DN

PRINT FORMAT	A6R-A4
PRINT SPEED	55 A4 pages/min
PRINT RESOLUTION	1,200 x 1,200 dpi
STANDARD PAPER FEED	600 (500 + 100 sheets)
OPTIONAL PAPER FEED	4 x 500 sheets
DUPLEX	Standard
PROCESSOR	Cortex-A9 / 1.2 GHz
PRINT MEMORY	512 MB (max 2.5 GB)
INTERFACES	10/100/1000BaseTX, USB 2.0, USB host (2), SD slot
INTERFACES OPTIONAL	IEEE 1284 parallel, 10/100/1000BaseTX, WLAN card
EMULATIONS	PCL6 (5e, XL), KPDL 3 (PostScript 3 compatible), PRESCRIBE IIe, Line Printer, IBM Proprinter, XPS, Open XPS

P-6033DN

PRINT FORMAT	A6R-A4
PRINT SPEED	60 A4 pages/min
PRINT RESOLUTION	1,200 x 1,200 dpi
STANDARD PAPER FEED	600 (500 + 100 sheets)
OPTIONAL PAPER FEED	4 x 500 sheets
DUPLEX	Standard
PROCESSOR	Cortex-A9 / 1.2 GHz
PRINT MEMORY	512 MB (max 2.5 GB)
INTERFACES	10/100/1000BaseTX, USB 2.0, USB host (2), SD slot
INTERFACES OPTIONAL	IEEE 1284 parallel, 10/100/1000BaseTX, WLAN card
EMULATIONS	PCL6 (5e, XL), KPDL 3 (PostScript 3 compatible), PRESCRIBE IIe, Line Printer, IBM Proprinter, XPS, Open XPS

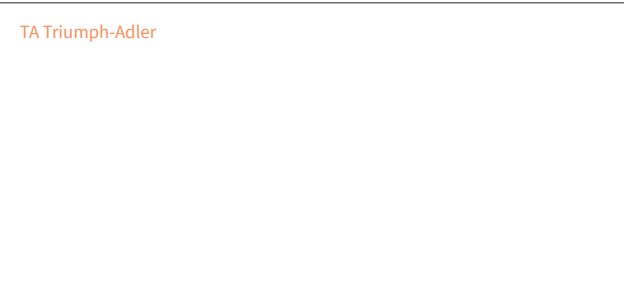

We develop **individual processes in the fields of document solutions, information and IT**. Document technology is our core business and we continuously develop our portfolio. At the same time, we assist our customers in creating flexible and modern workplaces with our pioneering mobile solutions and cloud services. Efficient processes are crucial for the success of a company. **We can assist you with solutions for saving time and money with your workflows** and support you with our expertise in implementing professional hardware and software solutions.